

# FS-500 Series – Low Cost Units for Threaded Plastic Piping

**Flow Rate Settings:** 0.25 GPM to 5.0 GPM  
**Port Size:** 3/4" NPT  
**Primary Construction Material:** Polypropylene  
**Setting Type:** Fixed

The FS-500 offers low cost flow monitoring with a variety of switch actuation points and low pressure drop. All wetted parts are polypropylene or stainless steel, making this switch ideal for a wide range of chemical and temperature requirements. The materials are also NSF or FDA approved for potable water treatment applications including chlorinators, purifiers and heaters. The FS-500 is ideal for equipment cooling including welders, lasers, etc. A J-box version with a 5 amp relay is also available.

## Specifications

<b>Wetted Materials*</b>	
Housing, Bonnet, Shuttle, Shuttle Cap	Polypropylene, Hydrolytically Stable
O-Ring	Viton® or Buna N
Spring	316 Stainless Steel
Retaining Clip	PH 15-7 Mo Stainless Steel
Operating Pressure, Maximum	100 PSIG @ +70°F
	50 PSIG @ +180°F
Operating Temperature, Maximum	212°F (100°C)
Set Point Accuracy	± 20%
Set Point Differential	± 20% Maximum
Switch**	SPST, N.O. Pilot Duty 20 VA, 120-240 VAC or VDC
J-Box with 5A Relay	120 VAC 50/60 Hz Contacts: 5A – 240 VAC Res 1/3 HP – 120 VAC 5A – 28 VDC Res.
Inlet/Outlet Ports	3/4" Female NPT
<b>Electric Termination</b>	
Pilot	No. 22 AWG, 24" Zip Cord Lead Wires
J-Box	6' Cable

\* Materials of Construction are available for FDA or NSF Compliance.


\*\* See "Electrical Data" on Page A-4 for more information.

## How To Order – Standard Models


Specify Part Number based on switch actuation set point. Set points other than those listed are available as special order; contact GEMS with your requirements.

Switch Actuation Set Point GPM	Part Numbers	
	Pilot Duty	J-Box w/5A Relay
0.25	170231 ⚡	175901
0.50	170232 ⚡	175902
1.00	170233 ⚡	---
2.00	175117 ⚡	---
2.50	170234 ⚡	---
5.00	170235 ⚡	---

⚡ – Stock Items.

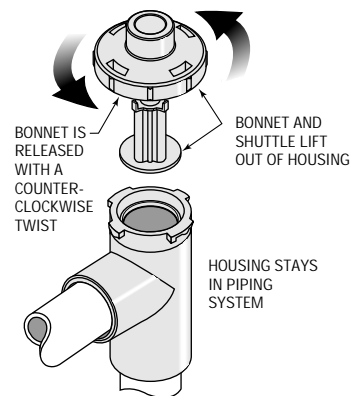

## Dimensions

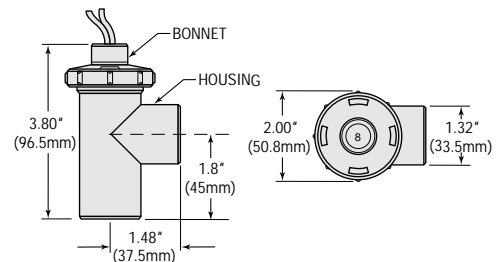

## Pressure Drop - Typical

